

Note before installation:



Warning

- 1, Do not fix it in the place with water or water vapor in surface, not install in the bathroom which with heavy moisture, in order to avoid electric shock.
- 2, You must commission professional electrician to install power lines, or else it has electric shock hazard.
- 3, You must cut off power before operation and ensure the protection no power.
- 4, Requests to install leakage circuit breakers or protection against fire hazards
- 5, Do not decompose, repair or any alteration of this machine without authorization, otherwise there is a risk of electric shock, fire and other accidents.

Attention

- 1, To ensure that no other things in the outlet around 400mm. Meanwhile do not install it above the stainless steel or artificial marble such shining surface location, otherwise prone to misoperation.
- 2, The body should be firmly fixed to the smooth wall to avoid injuries caused by the decline of product or product damage.
- 3, Do not install the products in such place with corrosive or flammable gases or objects, it may cause fire or product failure and malfunction
- 4, Do not install the products in such environment with multi dust or in high temperature, it may cause product damage.


Components Name:

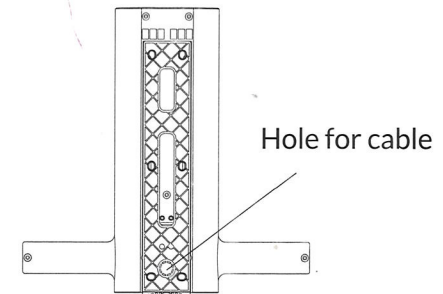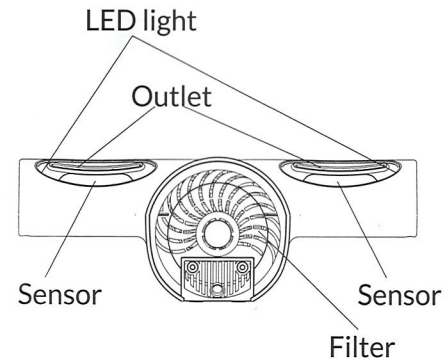

Technical parameters:


Rated Power	1200W	Waterproof Grade	IPX1
Motor Power	700W	Wind Speed	95m/s
Ambient Temperature	0-40°C	Drying Time	7-12s
Sensing Distance	12±3CM	Way of Heating	PTC

Cleaning of filter cartridge:



Take out the filter

2 Clean the dust on the filter screen, do not wash. If there is too much dust, please replace it







Inset the filter back




Attention

Attention: If the wind becomes weaker, please clean the filter screen in time. Generally, it needs to be cleaned one or two times. Water is not allowed.




①. Method of installation (Plug in Directly)

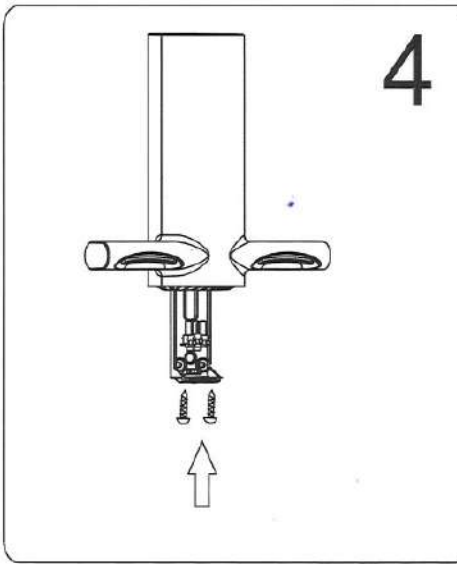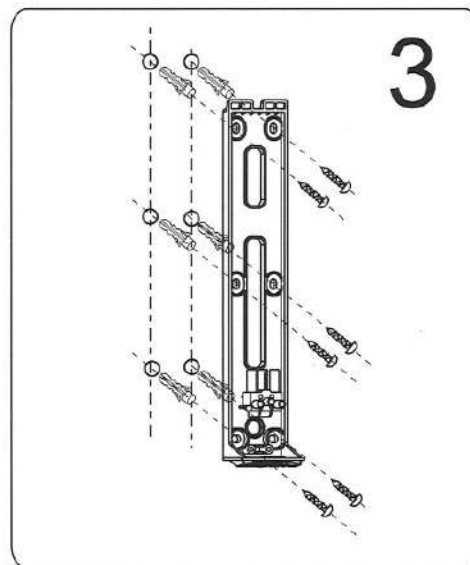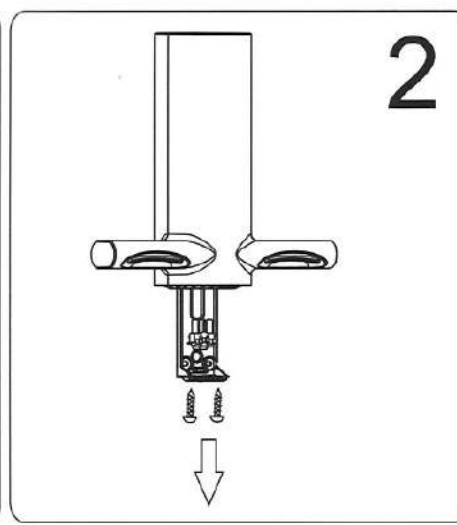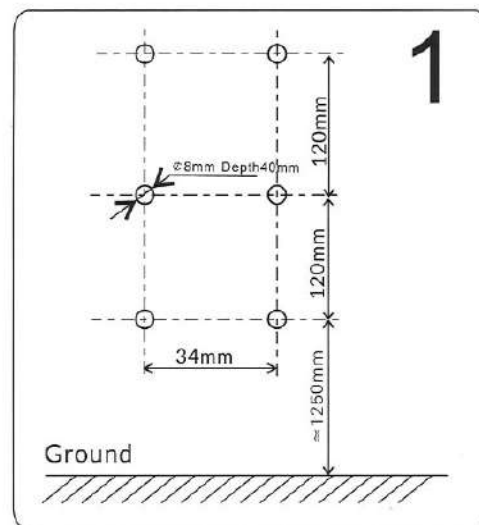

②. Method of installation (Hard Wired)

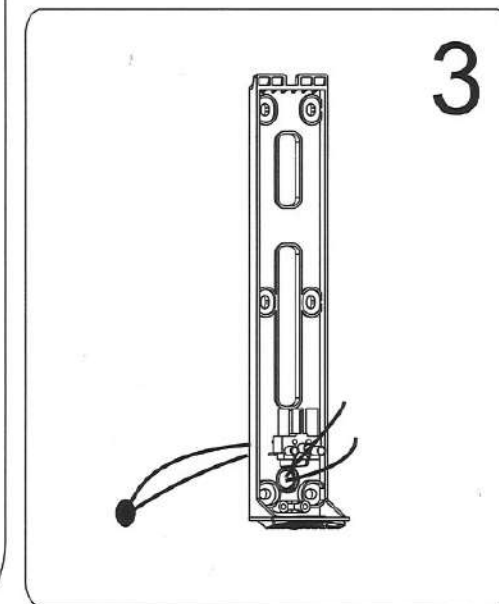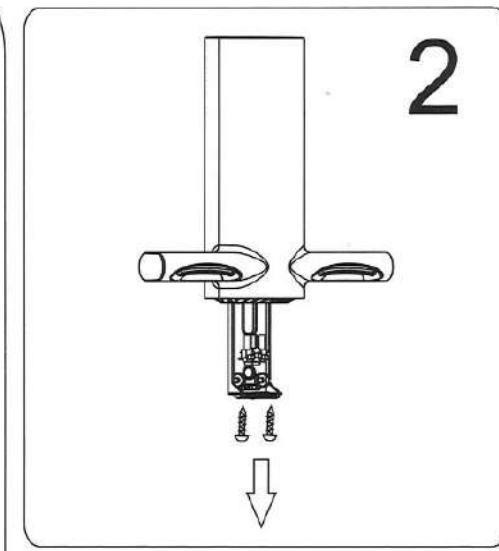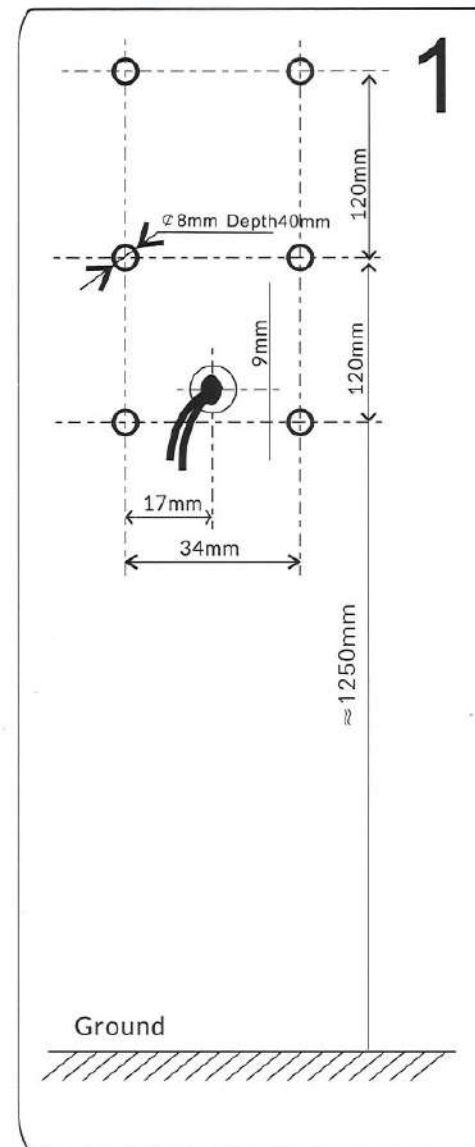

②.Method of installation (Hard Wired)

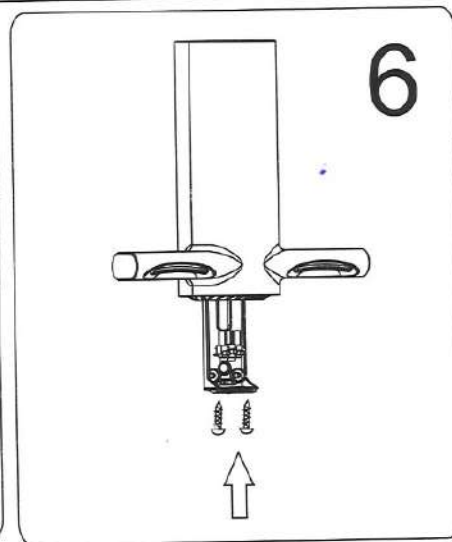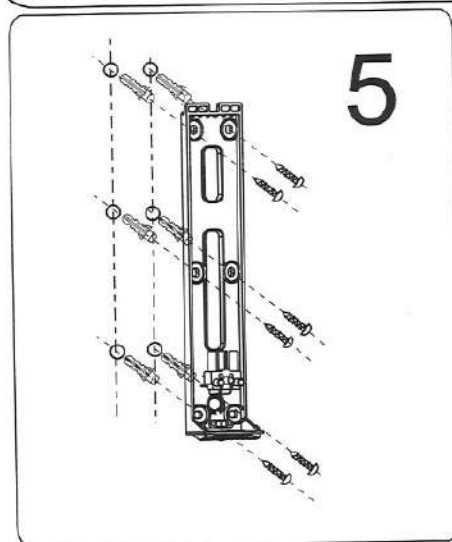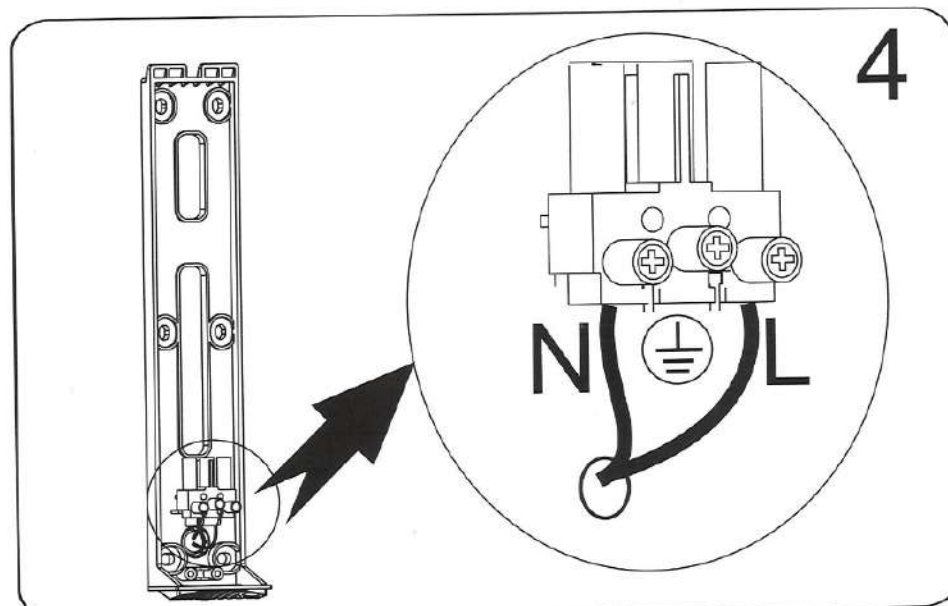

Test Run

	Steps	Confirm information	Check & Notice
1	Shake the machine gently	The machine is installed firmly without shaking	If not installed correctly, the unit will shake and make noise during operation
2	Confirm the power and voltage	Please use the rated Voltage	Incorrect voltage may burn out machines or cause accidents if the power use is incorrect
3	Switch on the power	Make sure power cord is correctly wired	Please check power flow when the indicator light is not bright
4	Slide hands under hand dryer at correct distance to dry optimally	Hand dryer should turn on with hands placed underneath	Confirm whether your hands are at the correct distance from the dryer if it does not turn on

Daily use and maintenance


External maintenance

Best cleaned with a soft dry cloth and neutral detergent.


Do not use organic solvents, acid or alkaline toilet cleaner, cleaning brush, etc. Otherwise, it will destroy the machines surface finish and/or produce discoloration.

Operation


1. No touch operation.
2. Shake excess water from hands.
3. Place hands under outlet to start operation.
4. Rub hands lightly and rapidly.
5. Stops automatically after hands are removed.



Slowly moving up the back of the hand before and after



Palm of the hand before and after slowly moving upwards



Rub hands