




Capac wc cu bideu



Descrierea produsului si prezentarea functiilor

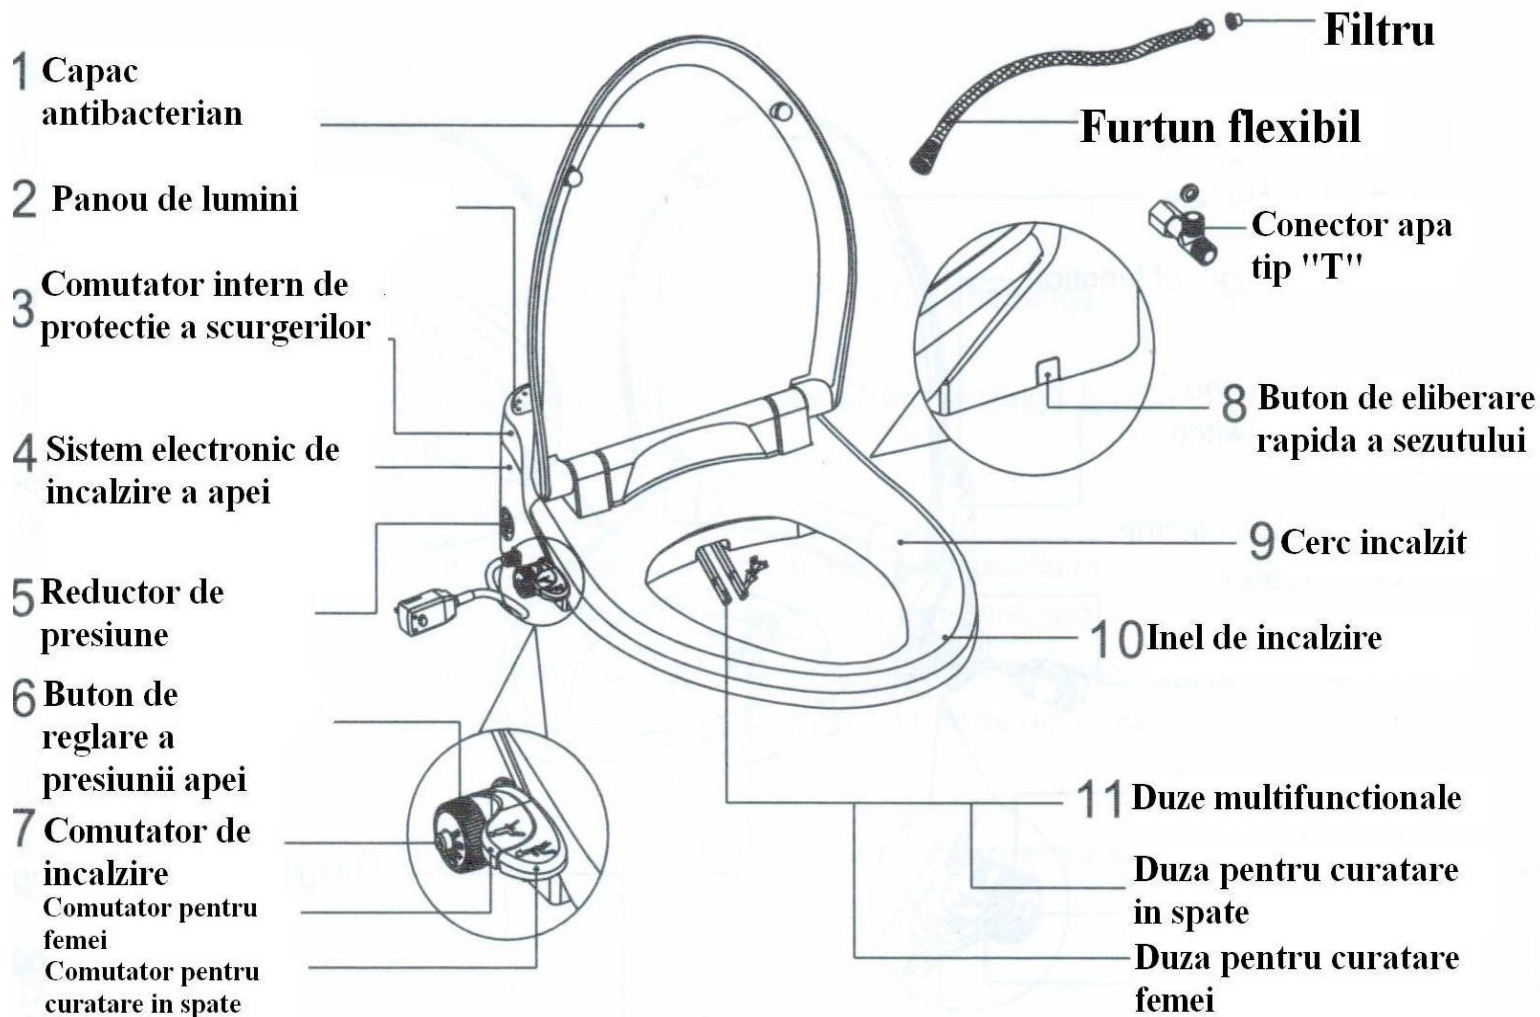


Curatarea duzelor

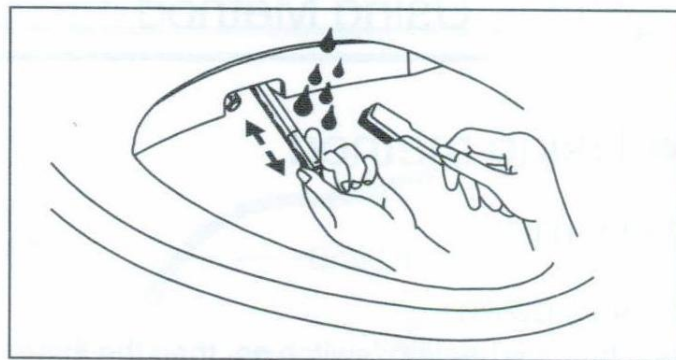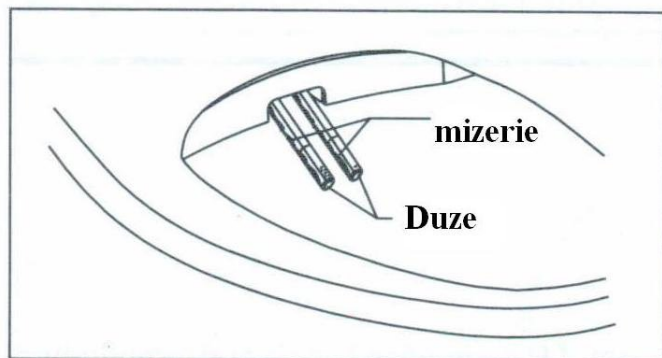


Tineti duza cu mana, trageți sau împingeti duza pentru a o întinde sau strânge.

Butonul nu poate anula o funcționare necorespunzătoare

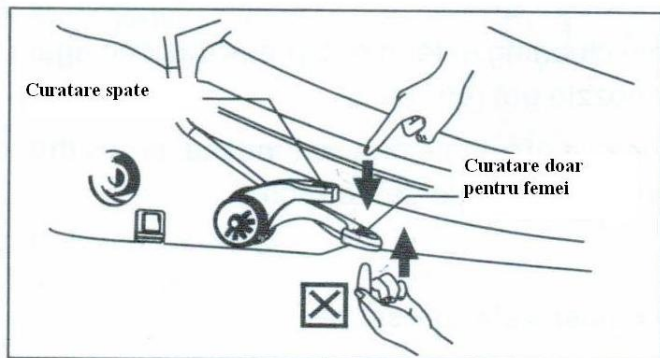

Asa cum se observa si in imaginea de mai sus, atunci cand butonul "curatare spate" sau "curatare pentru femei" este apasat in jos, spalarea se opreste daca trageți butonul in sus. ATENTIE! Nu fortati butonul pentru a evita deteriorarea acestuia

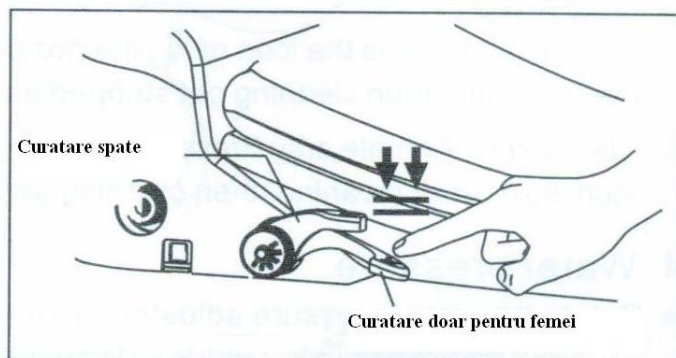

Asa cum apare si in imagine, apasati butonul "curatare spate" sau "curatare doar pentru femei" de doua ori, iar operatiunea de spalare va functiona si butonul va reveni la pozitia neutra. Apasarea butonului de doua ori nu este necesara din cauza vreunei erori, ci este rezultatul unei functionari necorespunzatoare.

Panoul de lumini

Bideul functioneaza daca ledul este aprins

Colacul este incalzit daca ledul este aprins. Daca este stins atunci colacul nu este incalzit.

Apa este incalzita daca ledul este aprins. Daca nu este aprins atunci apa nu este incalzita.


Daca presiunea apei este mica, atunci ledul se va aprinde intermitent.

Buton de reglare a presiunii apei

Apa calda/Apa rece

Buton de spalare


Buton de spalare pentru femei

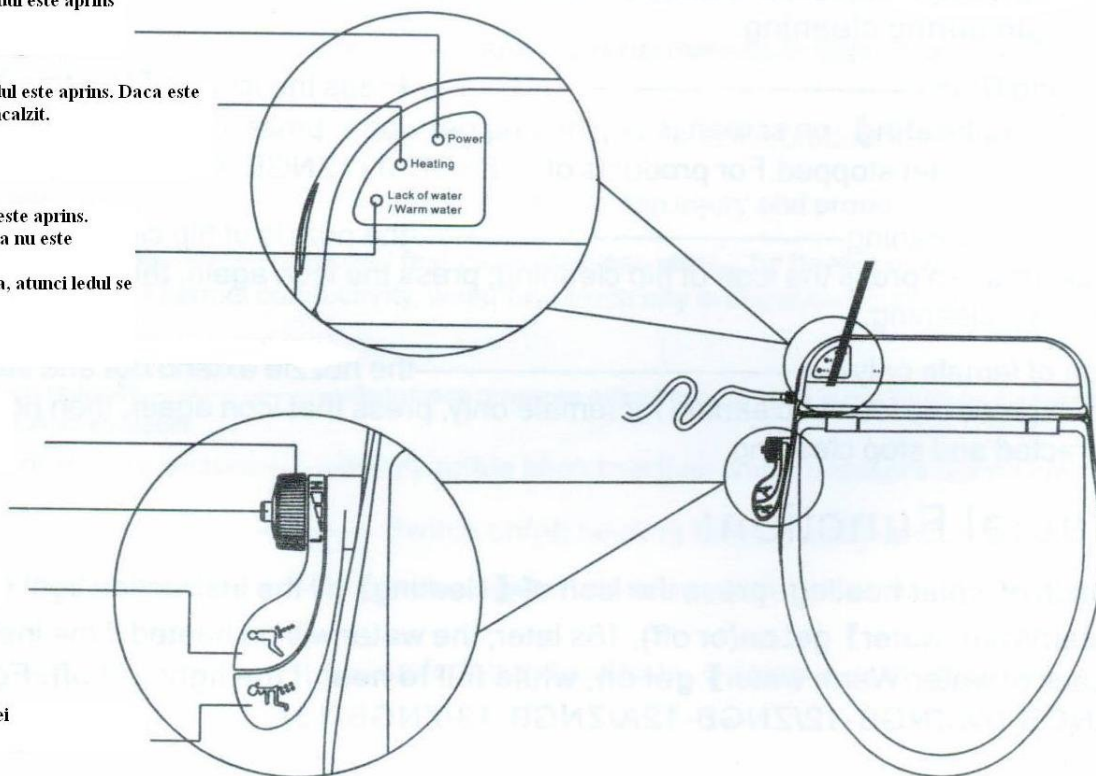

● Maintenance and cleaning about remained parts (half year or one year is recommended)


1.Pull the power plug out before cleaning

2.Release the seat

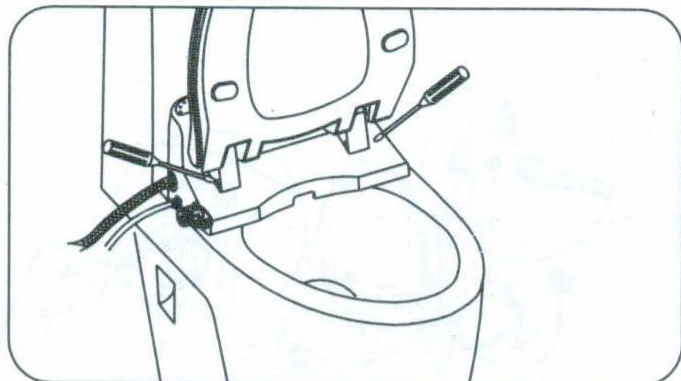

- a. put the seat up firstly.
- b. Release the seat with screw driver as picture show.


3.Disassemble power cord

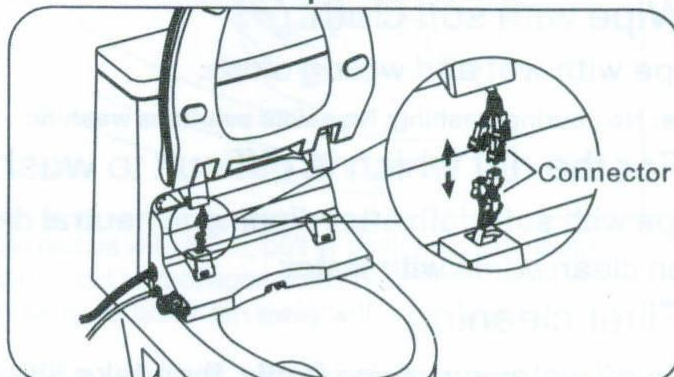

disassemble the connector as show in picture.


Notice-do not hardly pull the power cord

4.Cleaning

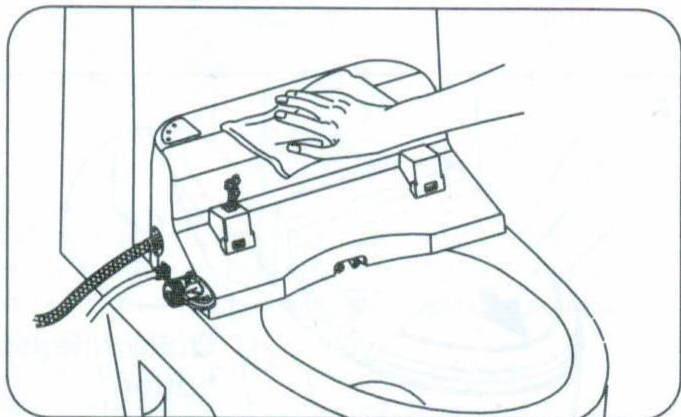

Cleaning dirty away with wet towel.


5.Connect power cord

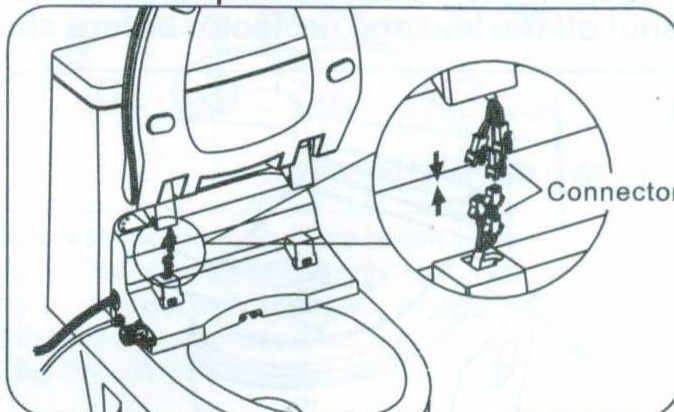

Plug in the connector .

Notice the color of connector

6.Install ring

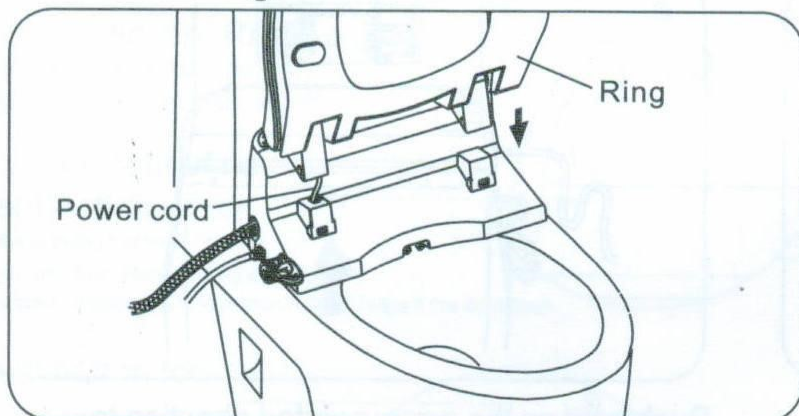

Install ring after connect the power cord.

Notice: need to protect power cord to avoid any damage when install ring



Maintenance Method

● Usual Maintenance

1 Wipe with soft cloth

Wipe with wet and wrung cloth.

Note: No pouring washing; No acidic solutions washing

2 For the dirt which is difficult to wash away

Wipe with soft cloth after dipping in neutral detergent, then clean again with water

3 Filter cleaning



Turn off water supplying firstly, then take filter out from inlet pipe and clean with water.

4 Nozzle cleaning


Hold nozzle with hand, then brush the nozzle with teeth brush.

5 Cleaning for seat and mount


a Shut off the leakage protector before cleaning

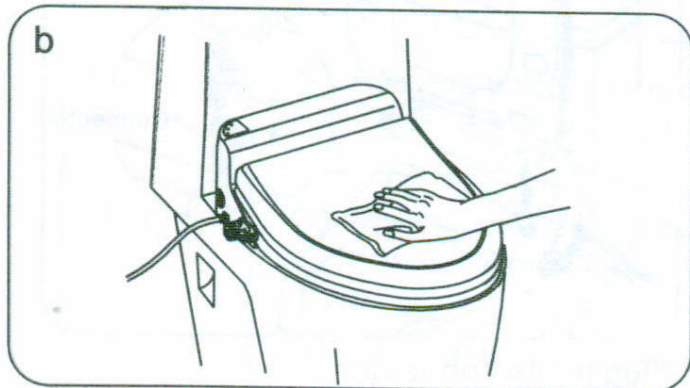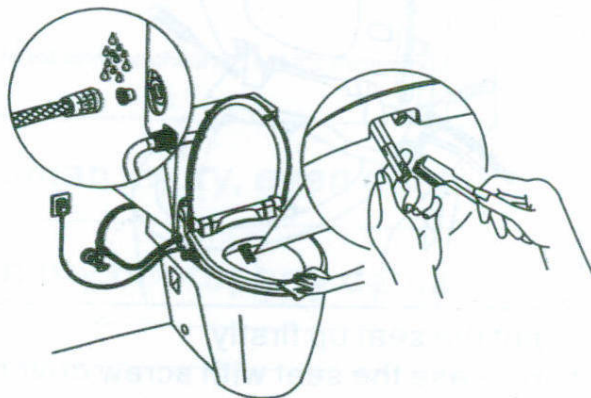


Wiping with wet towel as shown in picture.

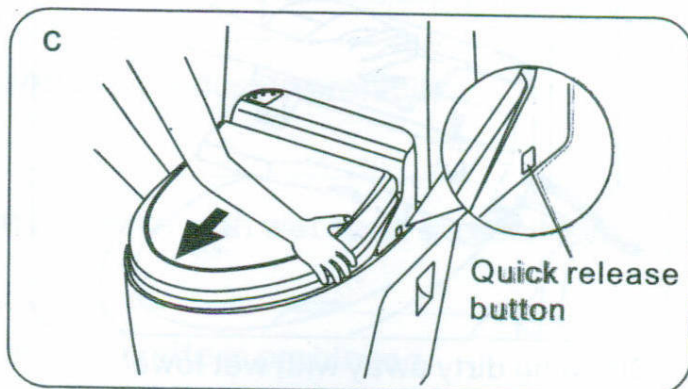

Pull out seat after press down the fixing button.

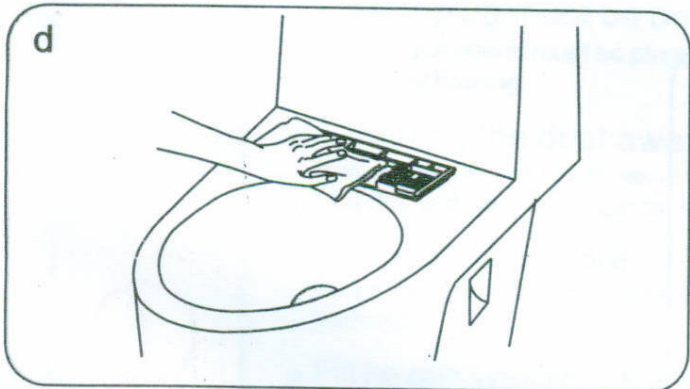

Wiping with wet towel as shown in picture.

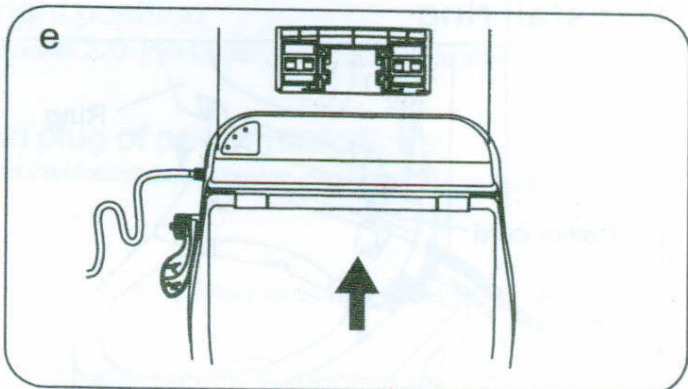

Push seat as the arrow pointed direction to make mount slide into seat base, seat get fixed after the voice "Ka".

f Plug the power plug in socket

Instructiuni de instalare

Important! Pentru siguranta, acest aparat necesita conectarea la o priza cu impamantare.

Metoda de instalare

1. Instalarea partii fixe (exista doua optiuni pentru suruburile de fixare)


a. Suruburi de plastic

- ① Fixati suruburile de plastic si placa ajustabila pe montant.
- ② Puneti montantul pe vasul de toaleta, fixati-l in pozitia corecta si introduceti saiba si surubul.
- ③ Impingeti colacul in directia indicata de sageata dupa ce ati fixat montantul in pozitia corecta.


b. Suruburi de metal

- ① Fixati suruburile de metal si placa ajustabila pe montant.
- ② Puneti montantul pe vasul de toaleta, fixati-l in pozitia corecta si strangeti suruburile cu o surubelnita.
- ③ Impingeti colacul in directia indicata de sageata dupa ce ati fixat montantul in pozitia corecta.


Suruburi de plastic

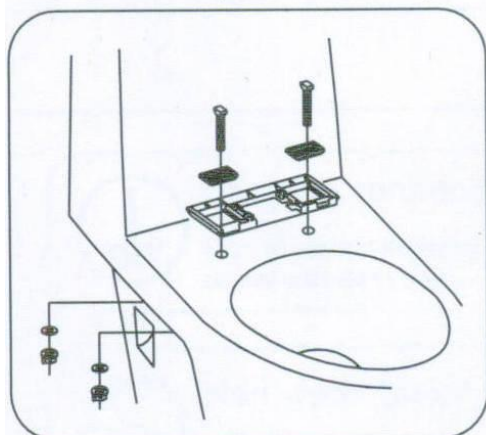



Suruburi de metal

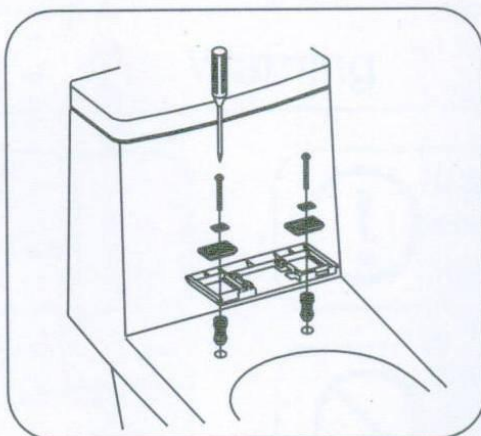


Instalarea colacului

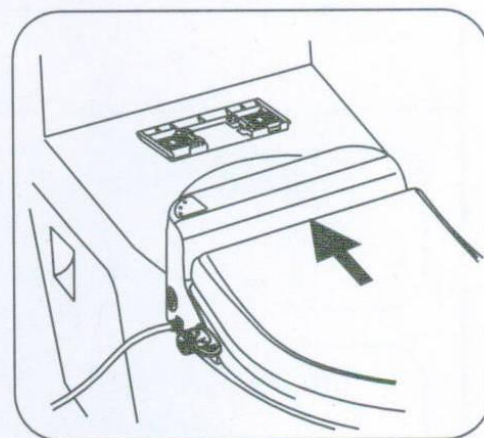

2. Marja de ajustare a montantului

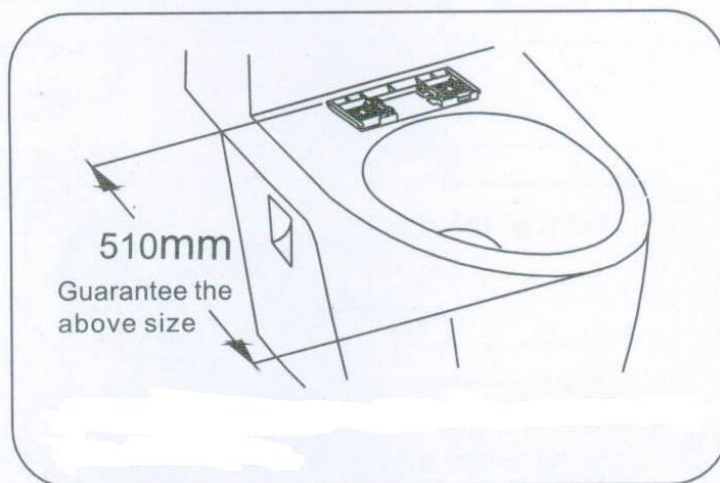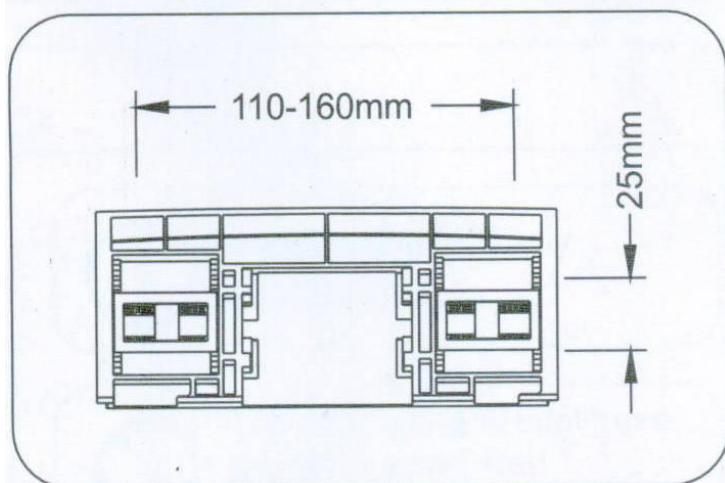

Instalarea corecta

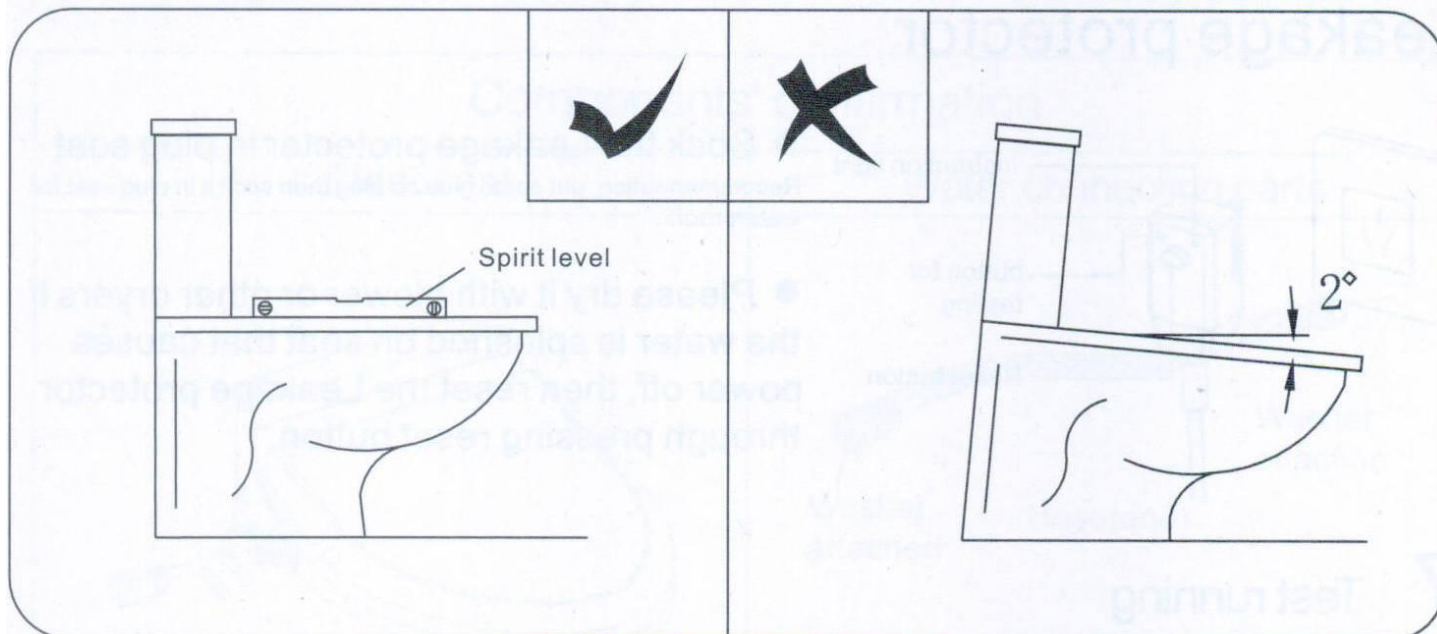


Keep spirit level in balance is required for the best installation of toilet.


Lean forward more than 2° or backward more than 5° for toilet installation is prohibited.

Probably damage components of the seat if install lean.


Instalarea conectorului la apa

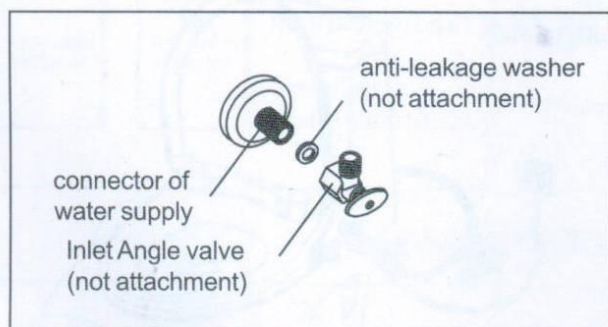

① As picture show, Connect Angle valve with the connector of water supply.

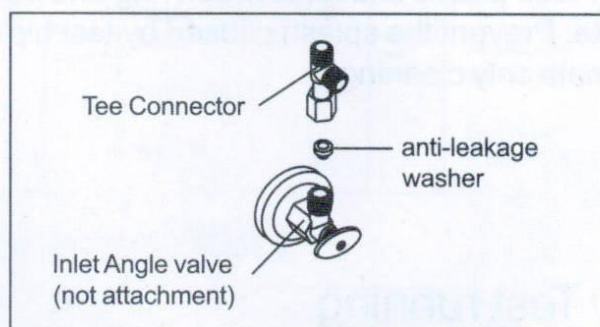

② As picture show, Fasten Tee connector on angle valve

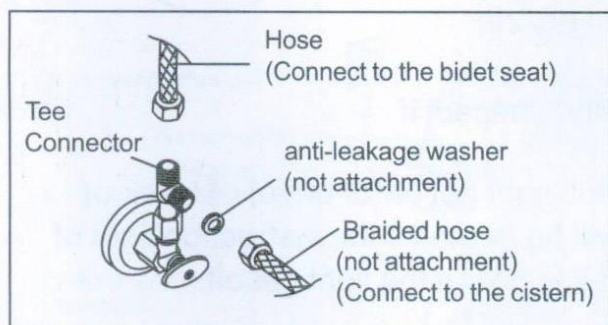

③ Connect the hose and braid hose with Tee Connector.

Note: Anti-leakage washer must be installed.